

MILA HARDWARE

SIDEWINDER



Features:

- Length 100mm.
- All zinc pressure die cast construction.
- All nylon bush bearing surfaces.
- Performance tested to pr EN 1935E:1999 grade II, 80kg door weight & 250kg overload test.
- 4mm "toe and heel" (lateral) adjustment.
- External - security version available.
- 0° and 15° angles to suit major profile systems.
- Available in white or brown finish.

ADJUSTABLE BUTT HINGE



Sidewinder Adjustable Butt Hinge

The Sidewinder is an adjustable butt hinge which (as its name suggests) is adjustable from the side for 4mm overall lateral adjustment. This adjustment is carried out by simply opening the door to 90° and adjusting the twin adjustment screws with a philips head screw driver.

Security Version

For additional security on open out doors a "security" version of the Sidewinder is available with a stainless steel security pin and concealed grub screw fixing.

Options

To suit profile systems with a flat overrebate a 0° (flat) male leaf is available, while a 15° male leaf has been produced to suit those profile systems with the relevant chamfer. Both the 0° and 15° hinges are available in a choice of white or brown finish and standard or security versions.


Specification:

Body male & female:	Zinc die cast BS1004
Pin and grub screws:	304 stainless steel
Bushes:	Nylon
Performance tested:	To pr EN 1935E:1999 Grade II, 80kg door weight & 250kg overload test
Guarantee:	10 year guarantee
Packaging:	30 per box

Description			Mila Comp. No.
White	Standard	0°	021200
White	Security	0°	021201
Brown	Standard	0°	021202
Brown	Security	0°	021203
White	Standard	15°	021230
White	Security	15°	021231
Brown	Standard	15°	021232
Brown	Security	15°	021233

SIDEWINDER

ADJUSTABLE BUTT HINGE

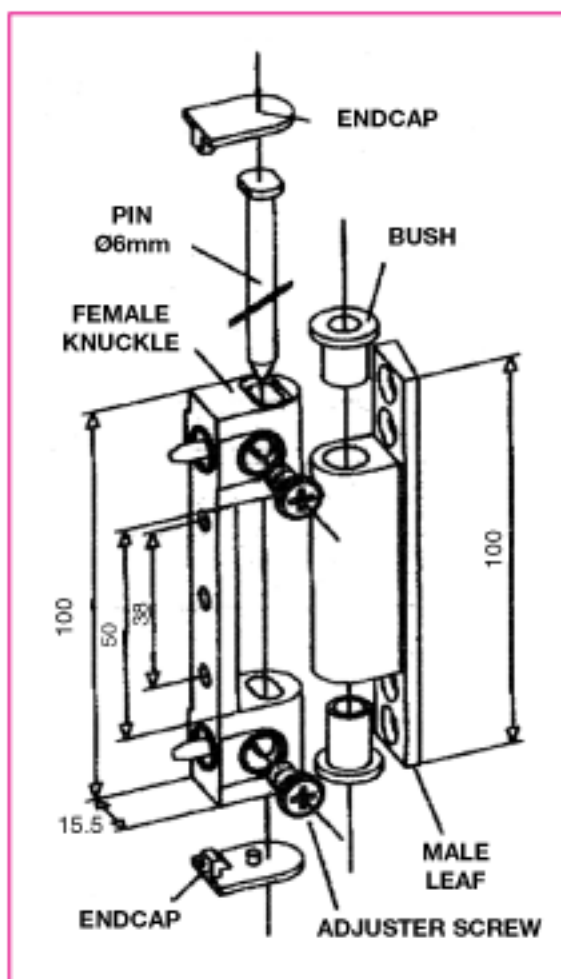

Guarantee

Made in the UK



MILA Hardware Ltd.

1 Brunel Close, Drayton Fields Industrial Estate, Daventry, Northamptonshire, NN11 5RB
Telephone: (01327) 872511 Sales: (01327) 312400 Fax: (01327) 872575

E-Mail: sales@mila.co.uk Web Site: www.mila.co.uk